

TECHNICAL DATA SHEET

Fixit 475

Primer for mineral-based final renderings




Areas of application

Fixit 475 is an undercoat for mineral-based final renders which evens out the absorptive characteristics of the substrate. It improves the adhesion of the final render. The substrate must be clean, dry and of adequate load-bearing capacity.


Properties

- Mineral
- Ready to use
- Simply and cleanly applied
- ECO certified

Application procedure

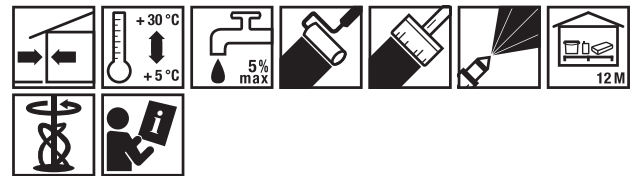

Technical data

Item number	2000634791
EAN	7630141502779
Packaging	
Quantity per unit	20 kg/unit
Unit per pallet	24 unit/Pal.
Consumption	approx. 0,175 kg/m ²

Material base

- Calcitic fillers
- Potassium water glass
- Synthetic resin dispersion
- Pigments

Fixit 475

Primer for mineral-based final renderings

Application procedure

Fixit 475 is ready-to-use. Stir well before application, if necessary add water (max. 5 %) to give the required working consistency.

Storage

Shelf life at least 12 months if stored unopened in the original containers and protected from frost, heat and direct sunlight.

Certificates



Label



Legal and technical information

The general rules of building construction must be observed, in addition to the current notes published by the «Swiss Association of Painters and Plasterers SMGV», the recommendation SIA 242 «Plaster and drywall work» and the information in this technical data sheet.

General information

This technical information sheet replaces all previous versions of the information sheet for this product. The details in this technical information sheet were drawn up carefully and conscientiously based on the current state of knowledge and experience and refer to the usual purpose of use. The information is provided without any warranties regarding accuracy and completeness and any and all liability is excluded. It also does not establish any contractual legal relationship with or subsidiary obligation of

Fixit AG. Customers and users are personally responsible for checking that the products are suitable for the intended purpose of use. The latest versions of our technical information sheets are available on our website or can be ordered from the competent branch.

All technical data listed in this product specification has been determined under laboratory conditions.

Do not apply when the air or substrate temperature is below +5 °C or above +30 °C. For uncoated finishing plasters, we recommend using the Fixit 475 coloured in the colour of the finishing plaster. Newly applied plaster must be allowed sufficient time to dry and for carbonation to complete.