

## TECHNICAL DATA SHEET

### Fixit 211

Roughcast mortar with adhesive agent




#### Areas of application

Fixit 211 is a roughcast mortar with adhesive agent, and is a component of the Fixit Restoration Plaster system. It helps to improve the adhesion of the subsequent plaster layer. The substrate must be clean, dry and of adequate load-bearing capacity.


#### Properties

- Machine compatible for economic renovations
- Secure application due to adhesion promoter
- Can be used as substrate for several base coats
- ECO certified

#### Application procedure

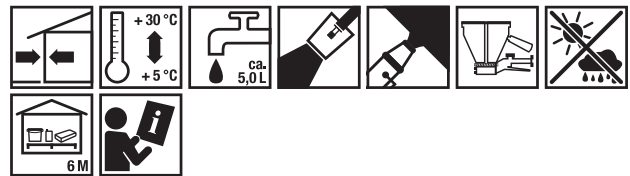

#### Technical data

Item number	2000578335
EAN	7630141502342
Packaging	
Quantity per unit	25 kg/unit
Unit per pallet	40 unit/Pal.
Grain size	0-3 mm
Consumption	approx. 3 kg/m <sup>2</sup>
Water addition average	5 L/bag
Compressive strength	≥ 20 N/mm <sup>2</sup> (28 d)
Pressure resistance	≥ 5 N/mm <sup>2</sup> (28 d)
Dry density	> 1600 kg/m <sup>3</sup>
Processing time	90 min - 120 min

# Fixit 211

Roughcast mortar with adhesive agent

## Material base

---

- Quarry sand, washed and selected
- Bonding agents
- Air-entraining agents
- Water retention agents
- Cements

## Application procedure

---

Fixit 211 should be mixed with clean water and then applied in a thin but complete layer by hand or using a conventional plastering machine. Coverage rate: 50–100% of the surface area.

## Post-application treatment

---

In extreme weather conditions (in direct sunshine, rapidly changing temperatures etc.) measures must be taken to protect the freshly applied rendering.

## Storage

---

Store in a dry place on wooden battens. Storage life min. 6 months. Binding properties may be affected if stored for longer.

## Certificates

---



## Label

---



## Legal and technical information

---

The general rules of building construction must be observed, in addition to the current notes published by the Swiss Association of Painters and Plasterers SMGV, the recommendations in SIA 242 Rendering and Plastering, SIA Note 2003 Restoration Plasters and Resoration Plaster Systems as well as the information in the relevant technical data sheets.

## General information

---

This technical information sheet replaces all previous versions of the information sheet for this product. The details in this technical information sheet were drawn up carefully and conscientiously based on the current state of knowledge and experience and refer to the usual purpose of use. The information is provided without any warranties regarding accuracy and completeness and any and all liability is excluded. It also does not establish any contractual legal relationship with or subsidiary obligation of Fixit AG. Customers and users are personally responsible for checking that the products are suitable for the intended purpose of use. The latest versions of our technical information sheets are available on our website or can be ordered from the competent branch.

All technical data listed in this product specification has been determined under laboratory conditions.

Do not apply when the air or substrate temperature is below +5 °C or above +30 °C. If intended for use as a component in the Fixit Fixit Restoration Plaster system, its suitability must be ascertained in advance (see System description)