

## TECHNICAL DATA SHEET

### Fixit 208

Basic mixture for restoration work




#### Areas of application

Fixit 208 is a paint-ready finish coat intended to serve as the basis for the creation of specially formulated plasters for the building site. An additional 10 % stone chippings or round grain stone of 1 - 4 mm may be added to create individual structure and intermediate layers. Base coats with hydraulic lime are suitable substrates. The substrate must be clean, dry and of adequate load-bearing capacity. Older base coats with poor strength may be reinforced by pretreating with Fixit 493 mineral Base Coat Stabilizer. Salt-affected and water-saturated substrates require special treatment in accordance with the Fixit Restoration Render System.


#### Properties

- Can be refined with regional additives such as marble pit lime
- Can be used as levelling and final coat
- Suitable for repairs to historically important façades
- For both indoor and outdoor use
- A range of final coat variations are possible
- ECO certified

#### Application procedure

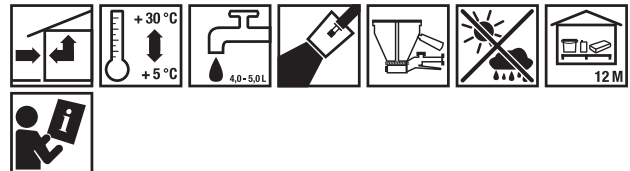

#### Technical data

Item number	2000634861
EAN	7630141502786
Packaging	
Quantity per unit	25 kg/unit
Unit per pallet	40 unit/Pal.
Grain size	0-2,8 mm
Consumption	approx. 1,3 kg/m <sup>2</sup> /mm
Water addition to	4-5 L/Sack
Layer thickness in-structions	Without additional granular material: up to 4 mm With additional granular material: up to 6 mm
Processing time	90-120 min

# Fixit 208

Basic mixture for restoration work

## Material base

---

- Air-entraining agents
- Water retention agents
- White hydrated lime
- White cement

## Application procedure

---

Fixit 208 should be mixed with clean water by hand. Marble pit lime may be added to the mixing water to improve smoothness and increase the strength of the render. The substrate must be wetted in advance of application. The surface structure can be created using trowel strokes, jute-sack impressions, brush strokes, whitewash etc. Plaster thicknesses in excess of 4 mm without granular additives must be executed in 2 layers. The first layer must be roughened to improve adhesion.

## Post-application treatment

---

The freshly applied render should be protected from exposure to bad weather and direct sunshine. Provide shade, additional humidification, protection from driving rain and hail etc. as necessary.

## Storage

---

Store in a dry place on wooden battens. Storage life min. 12 months. Binding properties may be affected if stored for longer.

## Certificates

---



## Label

---



## Legal and technical information

---

The general rules of building construction must be observed, in addition to the current notes published by the «Swiss Association of Painters and Plasterers SMGV», the recommendations SIA 242 «Rendering and Plastering» and the information in this technical data sheet.

## General information

---

This technical information sheet replaces all previous versions of the information sheet for this product. The details in this technical information sheet were drawn up carefully and conscientiously based on the current state of knowledge and experience and refer to the usual purpose of use. The information is provided without any warranties regarding accuracy and completeness and any and all liability is excluded. It also does not establish any contractual legal relationship with or subsidiary obligation of Fixit AG. Customers and users are personally responsible for checking that the products are suitable for the intended purpose of use. The latest versions of our technical information sheets are available on our website or can be ordered from the competent branch.

All technical data listed in this product specification has been determined under laboratory conditions.

Do not apply when the air or substrate temperature is below +5 °C or above +30 °C. Freshly applied surfaces may not be float smoothed. Allow the plaster to adequately carbonate before applying paint coats.