




HASIT PI 276 ÖKOSIL QUARZ


Silicate brush-on plaster interior/exterior

Areas of application: Slip-proof and easily filling silicate brush-on plaster for subsequent HASIT ÖKOSIL coatings. The brush-on plaster can be applied very easily and quickly by brushing, rolling or using a spatula. Decorative surface structures can also be individually created using various tools (perforated texture roller, wallpaper brush, natural sponge, etc.). Due to its physiological harmlessness and the absence of preservatives, HASIT PI 276 ÖKOSIL-QUARZ can be used in all living and sensitive areas.

- Properties:**
- Slip-proof and filling
 - Easy to structure
 - Highly diffusion-open and moisture-regulating
 - Mineral silicification on mineral substrates
 - Pollutant-free (VOC) and no preservatives
 - According to the principles of building biology and healthy living
 - Prevents mold thanks to its pH value

Application procedure:

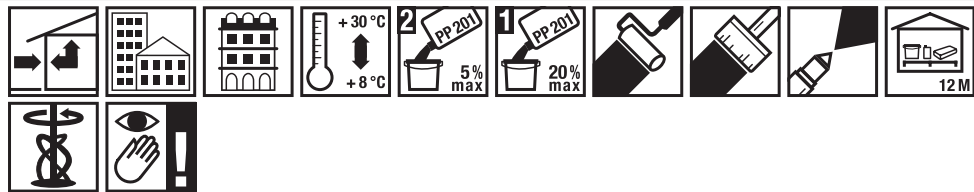

Technical data	
Item no.	2000954345
EAN	4038502159557
Customs Tariff No.	32061900
Packaging type	
Quantity per unit	15 l/unit
Unit per pallet	24 unit/Pal.
Colour	White
Consumption	approx. 0.145 l/m ² /c.
Density	approx. 1.48 kg/l
sd value	< 0.02 m
pH-value	approx. 11
VOC content	max. 30 g/l
Contrast ratio	Klasse 2
Resistant to wet scuffing	Class 3 (EN 13300)
Shine	matt, G ≥ 10 at angle 85°, G3
Grain size	fine < 100 µm, S1

- Material base:**
- Binder: Potassium silicate
 - Organic additives less than 5 %
 - Pigments: titan dioxide, mica, calcium carbonate, aluminium silicate
 - Fillers: calcium carbonate, silicates, marble flour
 - Additives: Resources for re-netting, defoamers

Application conditions: During processing and drying, the ambient or substrate temperature must not fall below 8 °C. The drying time depends on the construction site conditions. At a relative humidity of 65% and an ambient temperature of 20 °C, the surface is dry and can be painted over after approx. 5 hours. The coating is fully dry and resilient after approximately 3 days.



HASIT PI 276 ÖKOSIL QUARZ

Silicate brush-on plaster interior/exterior

Surface:	The surface must be without dust and filth. Substrates must be load-bearing. Cross-cut characteristics 0 and 1 according to EN 2409 must be achieved.
Types of substrate:	<p>Plaster of mortar group Ia and Ib: lime plasters: Highly absorbent surfaces are pre-treated with HASIT PP 201 SILICA LF. Newly applied HASIT lime plaster surfaces can be coated directly after a waiting period of 3 to 4 weeks. To prevent cloudy or spotty drying, pre-treatment with HASIT PP 201 SILICA LF is recommended.</p> <p>Plaster from mortar groups II and III: cement and lime-cement plasters: Highly absorbent surfaces must be pre-treated with HASIT PP 201 SILICA LF. Direct coating on newly applied HASIT lime-cement plasters after a waiting period of three to four weeks.</p> <p>Plaster of mortar groups IV and V: gypsum, gypsum lime and anhydrite plasters: Any sinter layers, dirt or dust must be completely removed. Gypseous surfaces require a priming coat of PP 301 HYDRO LF. Then two-layer coating with primer and final coating.</p> <p>Clay plasters: Cleaning of the surfaces to be coated and priming with HASIT PP 201 SILICA LF.</p> <p>Gypsum boards, gypsum plasterboards, wallboards, solid gypsum boards: Primer coat with HASIT PP 317 ISO LF. Intermediate and finishing coat afterwards.</p> <p>Concrete: Interior concrete surfaces must be brushed and dusted. Any cement slurry present must be removed mechanically. Contaminants such as formwork release oil, grease and wax must be removed using a steam cleaner. Small defects and cavities can be repaired using HASIT fillers. It is generally recommended to pre-treat concrete surfaces with HASIT PP 201 SILICA LF.</p> <p>Bearing, mineral coatings (silicate, cement, lime-cement, lime coatings and thin-layered plasters): Highly absorbent surfaces must be pre-treated with HASIT PP 201 SILICA LF.</p> <p>Bearing, organic coatings (mate dispersion and mortar resin): Primer coat with HASIT PP 317 ISO LF.</p> <p>Bearing wallpapers: Unpainted ingrain wallpapers can be coated without pretreatment. For reliefs and embossed wallpapers, a test coat and a cross-cut test should be carried out.</p> <p>Clay coatings and non-bearing wallpapers: Precoats i.e. wallpapers should be completely removed and thoroughly washed. Precoat on the next bearing surface with e.g. RÖFIX PP 307 ISO LF (Note: test the bearing with grid section test).</p> <p>Unstable coatings and surfaces: Coatings which are still not stable after appropriate priming with PP 201 SILICA LF or PP 317 ISO LF must be removed mechanically.</p>
Surface pre-treatment:	<p>Small flaws: Before grounding and priming repair with suitable filler.</p> <p>Protection: Other surrounding surfaces like glass, ceramics, aluminium, windows, wooden surfaces, furniture, floors, etc. need to be covered (protected). Fresh paint stains need to be removed with a damp cloth or water.</p>
Application procedure:	<p>The product is ready for use after thorough stirring, but can be diluted to max. 10 % using PP 201 SILICA LF.</p> <p>The application is carried out with a wide brush, tassel, ceiling brush, roller or various decorative tools.</p> <p>The product can also be applied with a suitable paint sprayer.</p> <p>A continuous surface must be coated in one step, fresh-on-fresh or wet-on-wet, to avoid streaks. When using silicate paints on critical, highly absorbent substrates, we recommend applying the final coat on the base coat before it has completely dried.</p>
Packaging:	In recyclable plastic buckets.
Storage:	Store in a cool, hermetically sealed and frost-protected place. Can be stored for at least 12 months.
Hazard statements:	Please refer to our separate safety data sheets for detailed safety instructions. Read through these before use.

Certificates:





HASIT PI 276 ÖKOSIL QUARZ

Silicate brush-on plaster interior/exterior

General information:

This technical data sheet substitutes and annuls the previous editions of the same. Time-based values refer to standardised climatic conditions (+20 °C/65 % relative humidity). These can vary due to environmental factors, such as temperature, moisture and type of substrate.

The data is processed carefully and conscientiously, however they do not provide a warranty for the accuracy and completeness of the same, nor are they responsible for future decisions of users. These data itself is not based on legal relations or other additional obligations. These data do not release the customer from the obligation to check whether the product is suitable for its intended purpose.

Our products, as well as all raw materials contained in them, are subject to continuous monitoring in order to guarantee consistent quality.

If you have further questions, please contact your sales advisor or specialist retailer.

The current status of our technical bulletins can be found on our website or can be requested in the responsible office.