

TECHNICAL DATA SHEET

Fixit 493

Mineral-based undercoat stabilizer




Areas of application

Fixit 493 serves to solidify the outermost layers of weak, friable and porous base plasters based on lime or lime-cement. This type of solidified base plasters can be coated with mineral plasters. The surface must be clean, dry and dust free. Efflorescence and loose parts must be removed. Salinated and damp surfaces require a special evaluation.


Properties

- Mineral
- For limestone and cement based substrates
- Deep penetration

Application procedure

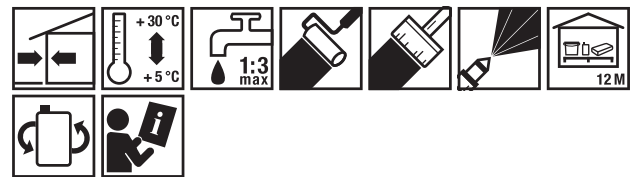

Technical data

Item number	2000143069
Technical Data Sheet information	Dilution: 1:1 to 1:3 with clean water
Packaging	
Quantity per unit	10 kg/unit
Unit per pallet	60 unit/Pal.

Material base

- Potassium water glass
- Organic additives less than 5 %

Fixit 493

Mineral-based undercoat stabilizer

Application procedure

Fixit 493 should be diluted with clean water and applied with a brush, roller or with spray equipment until the substrate is saturated. Repeat this process as necessary, depending on the absorbency of the substrate. Fixit 493 should be diluted with water in the ratio 1 part of product to 3 parts of water, again depending on the absorbency of the substrate. If the Aerogel insulating plaster Fixit 222 begins to harden, dilute to a maximum ratio of 1:1.

reinforced with Fixit 493 can be coated to advantage wet in wet with the mineral finish coat. All surfaces adjacent to the plaster being treated must be well covered and any splashes of Fixit 493 must be immediately removed with water. Eye and skin protection must be worn!

Storage

Shelf life at least 12 months if stored unopened in the original containers and protected from frost, heat and direct sunlight.

Legal and technical information

The general rules of building construction must be observed, in addition to the current notes published by the «Swiss Association of Painters and Plasterers SMGV», the SIA 242 «Plaster and drywall work» and the information in this technical data sheet.

General information

This technical information sheet replaces all previous versions of the information sheet for this product. The details in this technical information sheet were drawn up carefully and conscientiously based on the current state of knowledge and experience and refer to the usual purpose of use. The information is provided without any warranties regarding accuracy and completeness and any and all liability is excluded. It also does not establish any contractual legal relationship with or subsidiary obligation of Fixit AG. Customers and users are personally responsible for checking that the products are suitable for the intended purpose of use. The latest versions of our technical information sheets are available on our website or can be ordered from the competent branch.

All technical data listed in this product specification has been determined under laboratory conditions.

Do not use if air or ground temperature is below +5 °C. May not be used on gypsum-based plasters. Base layers