

## TECHNICAL DATA SHEET

### PLASTER 503SL

Machine-applied, cement-lime plaster, ultra-light




#### Areas of application

Intended for machine-spray execution of cement-lime, smooth plaster layers on indoor surfaces Suitable for executing plaster layers under paints and noble plasters on ceramic, autoclaved aerated concrete, lime-sandstone, concrete and other surfaces. Also suitable for use as a single- or multi-layer plaster mortar

#### Properties

- Waterproof
- Ultra-light
- Efficient
- Smooth surface
- Fine-grained
- Vapor-permeable

#### Application procedure

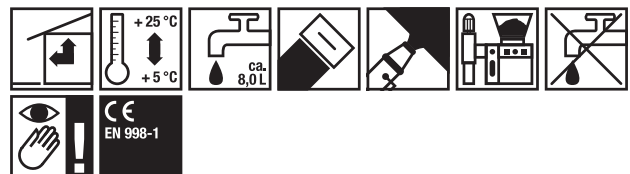

#### Technical data

Item number	30792
Packaging	
Quantity per unit	30 kg/unit
Unit per pallet	40 unit/Pal.
Grain size	0-0,5 mm
Colour	Grey
Consumption	1 kg/m <sup>2</sup> /mm
Water requirement	approx. 8,2 L/unit
Reaction to fire	A1
Thermal conductivity	< 0,45 W/mK
Chromium content	≤ 0,0002 %

## PLASTER 503SL

Machine-applied, cement-lime plaster, ultra-light

Item number	30792
Mortar class	CS I EN 998-1
Coating thickness	5-30 mm
Processing time	180 min

### Material base

- Hydrated lime
- Pearlite
- Portland cement
- Additives
- Quartz additive

### Application conditions

Apply in temperatures from +5 °C to +25 °C, these temperature refer to air, groundwork and product temperature. Plastering process shall be started after a period of settlement, shrinkage and desiccating of walls and concrete elements. Substrates suitable for plaster layers shall be durable, rigid, not susceptible to deformation nor have signs of moisture. In the case of concrete substrates, they shall be deprived of any anti-adhesive agents or oils used in formwork tasks.

### Surface

All groundworks must be cleaned and properly prepared. Very absorbent groundworks must be primed with GRUNTOBET 310 or EXPERT 314. Apply OBRZYTKA CEMENTOWA 550 rendering coat on ceramic groundworks. It is recommended to check the moisture content of the substrate before plastering.

Bricks and ceramic CMUs: depending on requirements, prime with GRUNTOBET 310 or GRUNT DO BETONU 314 or apply OBRZUTKA 550

Autoclaved aerated concrete elements: Prime with GRUNTOBET 310 or EXPERT CONCRETE PRIMER 314.

Silicate blocks: Prime with GRUNTOBET 310

Concrete, reinforced concrete: depending on requirements, prime with GRUNTOBET 310 or GRUNT DO BETONU 314 or apply OBRZUTKA 550

Expanded clay aggregate blocks: depending on requirements, prime with GRUNTOBET 310 or GRUNT DO BETONU 314 or apply OBRZUTKA 550

### Preparation

The dry mix should be made with an appropriate amount of clean, cool water by mixing in a plastering machine or mechanically using a mortar mixer or concrete mixer. The time of mechanical mixing should be 2-3 minutes. If necessary, depending on the conditions, slightly adjust the amount of water added. Do not mix the hardened grouting mixture again.

### Application procedure

Evenly apply the mortar on the entire plastered surface. Afterwards, even the plaster with a straightedge of H type removing excess plastering mortar perpendicularly to the application direction. Leave the surface treated this way until the plaster preliminarily bonds (approx. 1.5h). After this time, cut down the plaster with a feather edge until even surface develops. The plaster should be bonded so much in order that the feather edge will not pick it and so that it will result in its dusting. Rubbing the surface of the plaster with a styrofoam long float with a sponge or felt is the next stage. The rubbing process should start on the experimental basis. In the case of applying several layers, apply the successive ones after the previous one has set (after c.a. 24h)

### Instructions

Ventilate the rooms during the execution of works, but protect the plaster against drafts causing excessive drying of the surface if necessary, moisten the plaster with water from time to time

### Storage

Maximally 12 months In dry areas and in non-damaged packaging

## PLASTER 503SL

Machine-applied, cement-lime plaster, ultra-light

### General information

---

This product data sheet replaces all its previous versions. The information, included in this technical card, represents our current knowledge and practical experience. This is general information only which shall not obligate the manufacturer to take any responsibility either for workmanship or for the manner of use. For there may be differences and specific execution conditions. The product shall be applied in accordance with required technical knowledge and OHS rules. Avoid contact with skin and protect eyes. In case of contact with eyes, rinse them up with a large quantity of clean water and consult a doctor. It shall be recommended to use gloves, safety goggles and protective clothing.

All technical data listed in this product specification has been determined under laboratory conditions.