

## TECHNICAL DATA SHEET

### MURLEP-B 126

White, thin-layer masonry mortar for autoclaved aerated and silicate blocks




#### Areas of application

Masonry mortar on white cement for thin-jointed autoclaved aerated and silicate blocks Indoor and outdoor use


#### Properties

- Waterproof
- Frost-resistant
- Thin-layer
- Eliminates thermal bridges in the wall
- White
- Class M5

#### Application procedure

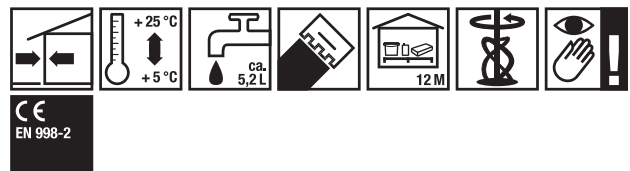

#### Technical data

Item number	16825
Packaging	
Quantity per unit	25 kg/unit
Unit per pallet	48 unit/Pal.
Grain size	0-0,5 mm
Colour	White
Consumption	≥ 3 kg/m <sup>2</sup>
Water requirement	approx. 5,2 L/unit
Reaction to fire	A1
Compressive strength	≥ 5 MPa (28 d)
Thermal conductivity	< 0,61 W/mK

## MURLEP-B 126

White, thin-layer masonry mortar for autoclaved aerated and silicate blocks

Item number	16825
Chromium content	≤ 0,0002 %
Mortar class	M5 EN 998-2
Processing time	120 min

### Material base

---

- Mineral fillers
- Portland cement
- Additives
- Quartz additive

### Application conditions

---

Apply in temperatures from +5 °C to +25 °C, these temperature refer to air, groundwork and product temperature. Walled up elements must be cleaned, stable and non-frozen

### Surface

---

It is recommended that elements of the same type, kind and class are executed in one story  
Autoclaved aerated concrete elements: apply directly, moisten if necessary  
Silicate blocks: apply directly, moisten if necessary

### Preparation

---

Pour the content of the packaging to 6.0 liters of clean, cool water, mix with a low-speed mixer to produce homogeneous mass. Mix again after several minutes. If necessary, depending on the conditions, slightly adjust the amount of water added. Do not mix the hardened grouting mixture again.

### Application procedure

---

Apply the prepared mortar onto the steel trowel and firmly spread a thin layer across the bed using the straight edge. The next step is to apply a thicker mortar layer and spread it

using the notched edge of the trowel at an angle of 45-60 degrees to the bed. The size of the area covered with the mortar shall be adjusted to the block laying capacity, not to exceed the open drying time of applied adhesive mortar. It can be verified by touching the grout with a finger, if no adhesion occurs, the open drying time was exceeded and the grout should be removed from the surface and replaced with a fresh layer. Use a dedicated masonry trowel for applying the mortar. Observe all tying principles when erecting walls. Lay the walled up elements directly on fresh mortar, face them and level them.

### Instructions

---

Protect against frostbite, precipitation and excessive drying in the execution of works and during the drying period. The use of protective covers is recommended. Joint thickness should be from 1 to 3mm In the case of: performing works during high temperatures, masonry absorptive wall elements, it is recommended that the blocks be moistened with water before applying the mortar. Failure to perform this activity will result in a high risk of burning the mortar and weakening its mechanical strength.

### Storage

---

Up to 12 months from the date of manufacture, in dry places and in intact packaging

### General information

---

This product data sheet replaces all its previous versions. The information, included in this technical card, represents our current knowledge and practical experience. This is general information only which shall not obligate the manufacturer to take any responsibility either for workmanship or for the manner of use. For there may be

## MURLEP-B 126

White, thin-layer masonry mortar for autoclaved aerated and silicate blocks

differences and specific execution conditions. The product shall be applied in accordance with required technical knowledge and OHS rules. Avoid contact with skin and protect eyes. In case of contact with eyes, rinse them up with a large quantity of clean water and consult a doctor. It shall be recommended to use gloves, safety goggles and protective clothing.

All technical data listed in this product specification has been determined under laboratory conditions.