


Window frame

Indoor insulating plaster with interface to window frame, in solid masonry

Variant 2

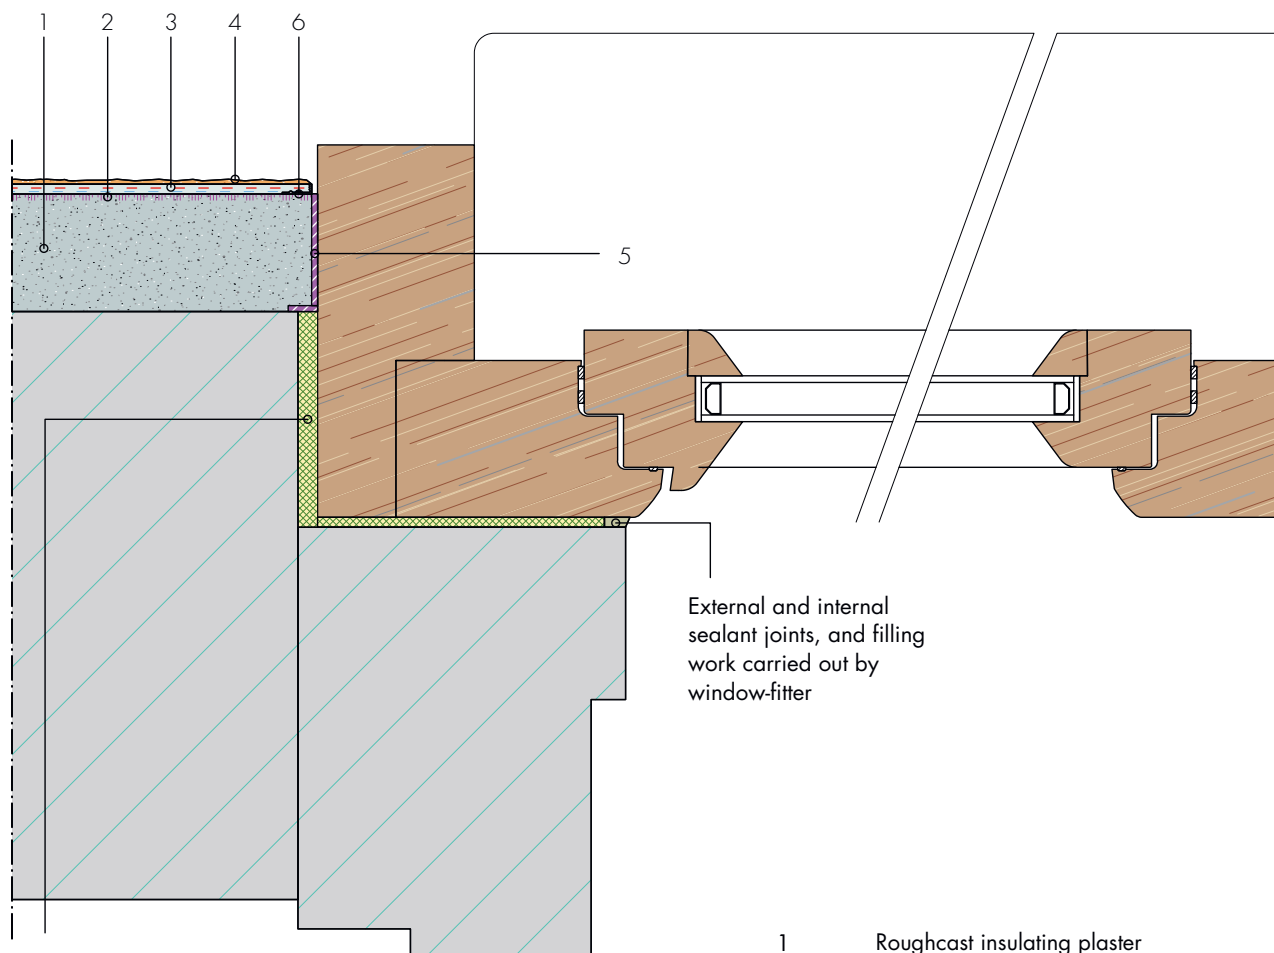

Foam fill carried out
by window-fitter

External and internal
sealant joints, and filling
work carried out by
window-fitter

- | | |
|---|---|
| 1 | Roughcast insulating plaster |
| 2 | Undercoat stabilizer Fixit 493* |
| 3 | Reinforcing textile mesh with Fixit 223 special embedding mortar, min 5mm |
| 4 | Mineral-based final coat and paint layer |
| 5 | SR grooved strip, compressible |
| 6 | Finishing profile with textile mesh |

*] Seulement pour l'enduit Aerogel Fixit 222