

## TECHNICAL DATA SHEET

### EXPERT 2

Specialist adhesive for gres tiles




#### Areas of application

Professional adhesive intended for applying gres tiles, also the large-format ones, as well as other types of ceramic, terracotta, clinker, wall and floor tiles, both on rigid and deforming groundworks, indoors and, in the case of using frost-proof tiles, also outdoors. Meant for tiling difficult surfaces: on balconies and terraces, in places of high level of moisture (bathroom, kitchens, laundry rooms), on jointless cement and anhydrite floors, also with underfloor heating systems. Can be also used for applying natural stone tiles (with the exception of marble), after verifying their possible discoloring.


#### Properties

- Waterproof
- Frost-resistant
- Flexible
- On the balconies and terraces
- For floor heating systems
- For old ceramic tiles
- Contains reinforcing fibers
- Class C2TE

#### Application procedure

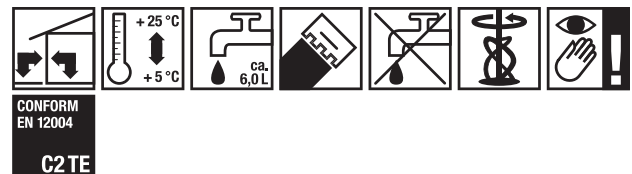

#### Technical data

Item number	29337
Packaging	
Quantity per unit	25 kg/unit
Unit per pallet	48 unit/Pal.
Grain size	0-0,5 mm
Colour	Grey
Consumption	1,3 kg/m <sup>2</sup> /mm
Water requirement	approx. 6 L/unit
Reaction to fire	A1/A1fl

## EXPERT 2

Specialist adhesive for gres tiles

Item number	29337
Tensile adhesive strength	≥ 1 N/mm <sup>2</sup>
Possibilities to enter	approx. 24 h
Load capacity	7 d
Chromium content	≤ 0,0002 %
Density	approx. 1,4 g/cm <sup>3</sup>
Adhesive group	C2 TE EN 12004+A1
Adhesive open time	30 min
Correction possibility	approx. 20 min
Drying time	24 h 48 h
Substrate temperature	5-25 °C
Processing time	3 h
Groutable	≥ 48 h

### Material base

- Reinforcing fibres
- Mineral fillers
- Polymers
- Portland cement

### Application conditions

Apply in temperatures from +5 °C do +25 °C. These temperatures apply to air, groundwork and product temperature. All groundworks should be load-bearing, tight, stable, cleared and, if necessary, primed with EXPERT 6 or GRUNTOLIT-W 301. Prime poor-quality groundworks with EXPERT 5 – deep-penetration primer. Smooth substrates that require increased adhesion are recommended to be primed with GRUNT CONTACT 307.

### Surface

Remove all unstable grouts and coats. Plasters and cement screeds must be at least 4 weeks old, gypsum plasters and anhydrite screeds must be at least 2 weeks old. Grind and vacuum anhydrite screed. Concrete groundwork must be at least 6 months old. Level all groundwork irregularities with

the 428 leveling grout. Irregular cement and concrete floor surfaces should be leveled with the EXTRA FLOOR 418, QUICK-SETTING SELF LEVELING GROUT 417 or EXPERS 419 self-leveling grout.

Concrete, reinforced concrete: Prime with CONTACT GRUNT 307

Gypsum, gypsum-lime, cement, cement-lime and lime cement: Prime with GRUNTOLIT-W 301 or EXPERT 6  
Gypsum plasterboards: Prime with GRUNTOLIT-SG 302 or EXPERT 5

Cement screed: Prime with GRUNTOLIT-W 301 or EXPERT 6

Anhydrite screed: Grind, clean and prime with GRUNTOLIT-SG 302 or EXPERT 5

Liquid foil, polymer-cement sealants: Do not prime  
Autoclaved aerated concrete elements: double prime with GRUNTOLIT -W 301

Bricks and ceramic CMUs, silicate: Prime with GRUNTOLIT-W 301 or EXPERT 6

Reinforcing layer in the thermal insulation system: Do not prime

Ceramic, gres, clinker, concrete tiles and other: Clean and execute a contact layer using the EXPERT 2 BIAŁY adhesive or the GRUNTOBET 310 primer

Terrazzo: Degrease, clean, and execute a contact layer made of elastic tile adhesive or prime CONTACT GRUNT 307.

## EXPERT 2

Specialist adhesive for gres tiles

### Preparation

---

Pour the dry mix gradually to a container with a sufficient amount of clean, cool water. Mix manually or using a low-speed mixer to produce a homogeneous mass without lumps. Leave to mature for 5 minutes and mix again. The mass should be thick enough not to slide from a trowel when set at an angle. Do not mix the hardened grouting mixture again. If there is a need to use a part of the packaging, the entire dry compound must be carefully stirred because during transport components could be separated. If needed, correct the amount of added water based on the application location (wall, floor).

### Application procedure

---

Apply the prepared mortar onto the steel trowel and firmly spread a thin layer across the bed using the straight edge. The next step is to apply a thicker mortar layer and spread it using the notched edge of the trowel at an angle of 45-60 degrees to the bed. The area covered with the mortar should be adjusted to the tiles laying abilities not to exceed the open drying time of the adhesive. It can be verified by touching the grout with a finger, if no adhesion occurs, the open drying time was exceeded and the grout should be removed from the surface and replaced with a fresh layer. The tiles should be laid by placing the second one as close to the first one and moving it to receive a joint of proper width. The tiles should not be wet before laying! Press tiles and if need be strike with a rubber hammer against the bed so that the adhesive will adhere to at least 70% of surface of a tile. Tiles bigger than 30x30 cm, all tiles laid outside and in permanently wet and intensively used places should be laid so that the adhesive will adhere to the entire tile surface. In order to meet these requirements the adhesive should be also applied to the entire back of the tile with a thin layer of equal thickness, covering the concavities and convexities. The joint width should be chosen based on the tile size. Internal floors adopt the following: minimum 2mm - at the tile side length up to 10 cm, 2-6mm - using tiles of 10-25cm, 4-8 mm - using tiles of 25-30 cm. Before the adhesive dries, the possible grout residue should be removed from the joints, and the tiles should be washed with water. For the external floors, depending on the tile colour and sunlight, the provided values should be increased by 50-80%. In case of clinker tiles, the floor should be coated with HYDROMUR-W 1010, but not sooner than 4 days after pointing. Facades exposed to precipitation should be protected from rainfall until the moment of impregnation.

### Instructions

---

Avoid contact with skin and protect eyes. Detailed guidelines are included in the material safety data sheet.

### Storage

---

Up to 12 months from the date of manufacture, in dry places and in intact packaging

### General information

---

This product data sheet replaces all its previous versions. The information, included in this technical card, represents our current knowledge and practical experience. This is general information only which shall not obligate the manufacturer to take any responsibility either for workmanship or for the manner of use. For there may be differences and specific execution conditions. The product shall be applied in accordance with required technical knowledge and OHS rules. Avoid contact with skin and protect eyes. In case of contact with eyes, rinse them up with a large quantity of clean water and consult a doctor. It shall be recommended to use gloves, safety goggles and protective clothing. All technical data is given for a temperature of +20 °C and a humidity of 60 %. In the case of drying times, binding, pointing, open, correction, water resistance, etc., these values are given for a typical layer thickness of the product, which for the tile adhesive is about 5mm, primer and self-leveling screed of about 10mm, screeds about 25mm. In special cases, they may deviate from this accepted average and should be determined experimentally. In case of doubts and not included in this record, it is recommended to contact the technical department of KREISEL. All technical data listed in this product specification has been determined under laboratory conditions.

## EXPERT 2

Specialist adhesive for gres tiles

Approximate consumption of cement tile adhesives		
Tile length	Size of the trowel teeth	Consumption
≤ 5 cm	3 mm	1,4 kg/m <sup>2</sup>
5-10 cm	4 mm	1,9 kg/m <sup>2</sup>
10-20 cm	6 mm	2,9 kg/m <sup>2</sup>
> 20 cm	8 mm	3,9 kg/m <sup>2</sup>
> 20 cm	10 mm	4,9 kg/m <sup>2</sup>